

V6 Series


Constant Voltage LED Driver

LED恒压驱动器

Features:

- Constant voltage driver
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Cooling by free air convection
- 100% full load burn-in test
- High efficiency, long life and high reliability
- IP67 design for indoor or outdoor

- 恒压型驱动
- 输出开路, 短路, 过载和超温保护
- 自然风冷
- 100%满载老化测试
- 高效率, 长寿命, 高可靠性
- IP67等级设计, 使用于室内和户外使用

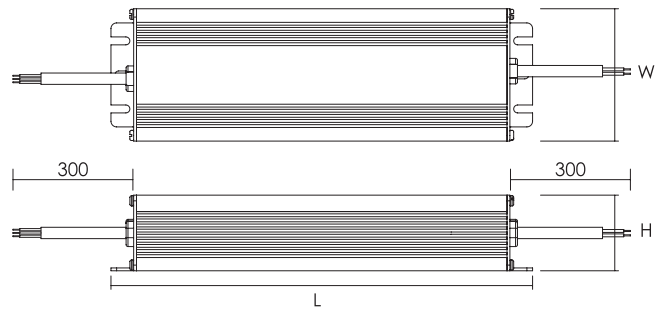

Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output voltage 输出电压 (V)	Output current 输出电流 (A)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions 尺寸 (mm)	Weight 重量 (g)
V6-100-12	100-240	100	12	0-8.3	0.95	91	<0.5	-20...+50	75	SELV	186x64x39	780
V6-100-24	100-240	100	24	0-4.2	0.95	92	<0.5	-20...+50	75	SELV	186x64x39	780
V6-150-12	100-240	150	12	0-12.5	0.95	91	<0.5	-20...+50	80	SELV	191x70x40	1000
V6-150-24	100-240	150	24	0-6.25	0.95	92	<0.5	-20...+50	80	SELV	191x70x40	1000
V6-200-12	100-240	200	12	0-16.6	0.95	91	<0.5	-20...+50	80	SELV	249x72x40	1000
V6-200-24	100-240	200	24	0-8.3	0.95	93	<0.5	-20...+50	80	SELV	249x72x40	1000
V6-240-12	100-240	240	12	0-20	0.95	92	<0.5	-20...+50	80	SELV	249x72x40	1000
V6-240-24	100-240	240	24	0-10	0.95	93	<0.5	-20...+50	80	SELV	249x72x40	1000
V6-320-12	100-240	264	12	0-22	0.95	92	<0.5	-20...+50	80	SELV	252x90x44	1000
V6-320-24	100-240	320	24	0-13.3	0.95	93	<0.5	-20...+50	80	SELV	252x90x44	1000