

LC Series

DALI Dimming LED Driver


DALI调光LED恒流驱动器

Features:

- Super slim design
- Dimmable constant current driver
- Analogue flicker-free
- DALI-2 certified
- Configurable constant current output via dip-switch
- Switch-Dim function
- Dimming range 1...100%
- Push wire connections
- Protections: open-circuit, short-circuit, overload, overtemperature
- SELV equivalent
- Driver for built-in use
- Suitable for use in emergency lighting systems
- Suitable for protection class I luminaires
- Protection class II



- 超细长紧凑设计
- 可调光恒流驱动
- 无频闪
- DALI-2认证
- 通过拨码开关选择输出电流
- Switch调光功能
- 调光范围1...100%光输出
- 按压式接线端子
- 输出开路, 短路, 过载和过温保护
- 符合安全特低电压标准
- 内置式驱动运用
- 适用紧急照明控制系统
- 适用I类灯具
- 保护等级 II

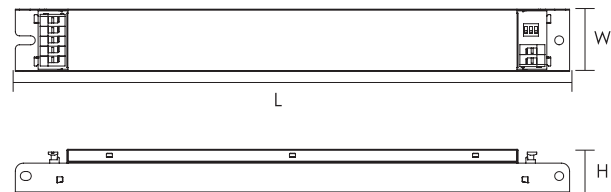

Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	Efficiency 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions 尺寸 LxWxH (mm)	Weight 重量 (g)
LC-45D	220-240	24.5	350	25-70	0.90C	85	<0.5	-20...+50	80	SELV	280x31.5x22	230
		35	500	25-70	0.90C	85						
		42	600	25-70	0.95	87						
		45	700	25-64	0.95	87						
		45	800	25-56	0.95	87						
		45	900	25-50	0.95	87						
LC-75D	220-240	75	1050	21-43	0.95	87					360x30x21	280
		75	1050	25-71	0.95	89	<0.5	-20...+50	80	SELV		
		75	1150	25-65	0.95	89						
		75	1200	25-62	0.95	89						
		75	1300	25-58	0.95	89						
		75	1400	25-53	0.95	89						
75	1500	25-50	0.95	89								
75	1600	23-47	0.95	89								

